


Features


- Epitaxial planar die construction.
- Complementary Pair.
- Ultra-small surface mount package.

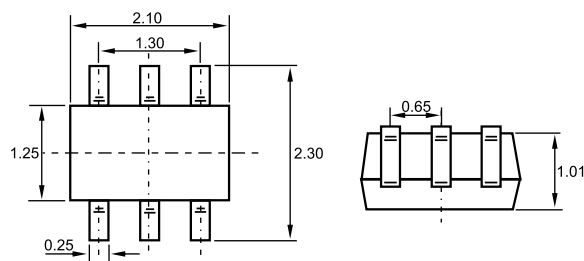

SOT-363

Applications

- Ideal for low power amplification and switching .



MAXIMUM RATING ,NPN 2222A Section @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	75	V
V_{CEO}	Collector-Emitter Voltage	40	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current -Continuous	600	mA
P_D	Power Dissipation	200	mW
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	625	°C/W
T_j, T_{stg}	Junction and Storage Temperature	-55 to+150	°C

MAXIMUM RATING ,PNP 2907A Section @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	-60	V
V_{CEO}	Collector-Emitter Voltage	-60	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current -Continuous	-600	mA
P_D	Power Dissipation	200	mW
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	625	°C/W
T_j, T_{stg}	Junction and Storage Temperature	-55 to+150	°C

ELECTRICAL CHARACTERISTICS OF TR2 , NPN2222A SECTION

@ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	75	-	V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=10mA, I_B=0$	40	-	V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	6	-	V
Collector cut-off current	I_{CBO}	$V_{CB}=60V, I_E=0$	-	10	nA
		$V_{CB}=60V, I_E=0, T_A=150^\circ C$	-	10	μA
Collector cut-off current	I_{CEX}	$V_{CE}=60V, V_{EB(OFF)}=3.0V$	-	10	nA
Emitter cut-off current	I_{EBO}	$V_{EB}=3V, I_C=0$	-	10	nA
Base cut-off current	I_{BL}	$V_{CE}=60V, V_{EB(OFF)}=3.0V$	-	20	nA
DC current gain	h_{FE}	$V_{CE}=10V, I_C=100\mu A$	35	-	
		$V_{CE}=10V, I_C=1.00mA$	50	-	
		$V_{CE}=10V, I_C=10mA$	75	-	
		$V_{CE}=10V, I_C=150mA$	100	300	
		$V_{CE}=10V, I_C=500mA$	40	-	
		$V_{CE}=10V, I_C=10mA, T_A=-55^\circ C$	50	-	
		$V_{CE}=1.0V, I_C=150mA,$	35	-	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=150mA, I_B=15mA$	-	0.3	V
		$I_C=500mA, I_B=50mA$	-	1.0	
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=150mA, I_B=15mA$	0.6	1.2	V
		$I_C=500mA, I_B=50mA$	-	2.0	
Transition frequency	f_T	$V_{CE}=20V, I_C=20mA, f=100MHz$	300	-	MHz
Output Capacitance	C_{obo}	$V_{CB}=10V, f=1.0MHz, I_E=0$	-	8	pF
Input Capacitance	C_{ibo}	$V_{EB}=0.5V, f=1.0MHz, I_C=0$	-	25	pF
Noise Figure	NF	$V_{CE}=10V, f=1.0kHz, I_C=0.1mA$ $R_g=1.0K\Omega,$	-	4.0	dB
Delay Time	t_d	$V_{CC}=30V, I_C=150mA,$ $V_{BE(off)}=-0.5V, I_{B1}=15mA$	-	10	ns
Rise Time	t_r		-	25	ns

ELECTRICAL CHARACTERISTICS OF TR2, PNP2907A SECTION

@ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -10\mu A$ $I_E = 0$	-60	-	V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -10mA$ $I_B = 0$	-60	-	V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -10\mu A$ $I_C = 0$	-5	-	V
Collector cut-off current	I_{CBO}	$V_{CB} = -50V$ $I_E = 0$ $V_{CB} = -50V$ $I_E = 0$ $T_A = 125^\circ C$	-	-10	nA μA
Collector cut-off current	I_{CEX}	$V_{CE} = -30V$ $V_{EB(OFF)} = -0.5V$	-	-50	nA
Base cut-off current	I_{BL}	$V_{CE} = -30V$ $V_{EB(OFF)} = -0.5V$	-	-50	nA
DC current gain	h_{FE}	$V_{CE} = -10V$ $I_C = -100\mu A$ $V_{CE} = -10V$ $I_C = -1mA$ $V_{CE} = -10V$ $I_C = -10mA$ $V_{CE} = -10V$ $I_C = -150mA$ $V_{CE} = -10V$ $I_C = -500mA$	75 100 100 100 50	- - - 300 -	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -150mA$ $I_B = -15mA$ $I_C = -500mA$ $I_B = -50mA$	-	-0.4 -1.6	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -150mA$ $I_B = -15mA$ $I_C = -500mA$ $I_B = -50mA$	-	-1.3 -2.6	V
Transition frequency	f_T	$V_{CE} = -20V$, $I_C = -50mA$, $f = 100MHz$	200	-	MHz
Output Capacitance	C_{obo}	$V_{CB} = -10V$, $f = 1.0MHz$, $I_E = 0$	-	-8.0	pF
Input Capacitance	C_{ibo}	$V_{EB} = -2.0V$, $f = 1.0MHz$, $I_C = 0$	-	30	pF
Turn-on time	t_{on}	$I_C = -150mA$, $V_{CC} = -30V$, $I_{B1} = -15mA$	-	45	ns
Delay Time	t_d	$V_{CC} = -30V$, $I_C = -150mA$, $I_{B1} = -15mA$	-	10	ns
Rise Time	t_r		-	40	ns

TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

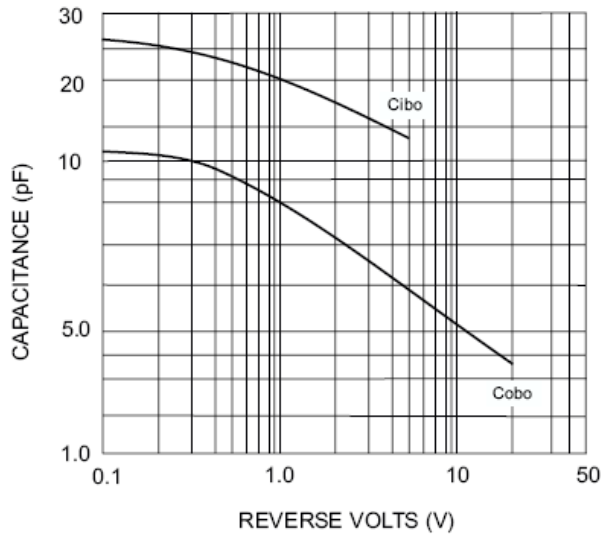


Fig. 1 (2222A) Capacitances (Typical)

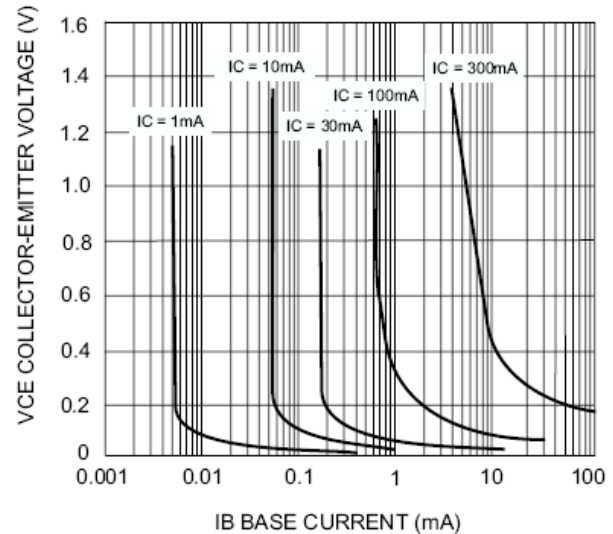


Fig. 4 (2907A) Typical Collector Saturation Region

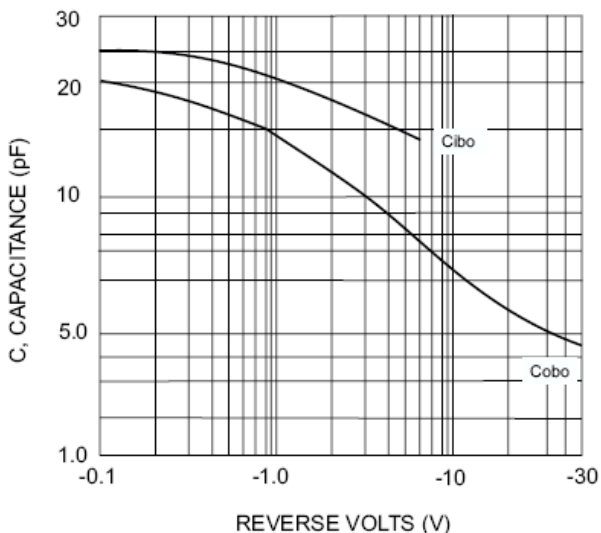


Fig. 3 (2907A) Capacitances (Typical)

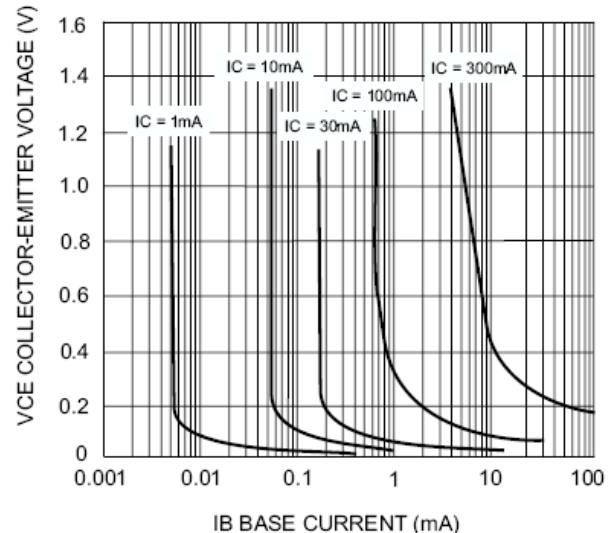


Fig. 4 (2907A) Typical Collector Saturation Region

CCS Semiconductor and **ese**mi are trademarks of Semiconductor Components Industries. CCS Semiconductor reserves the right to make changes without further notice to any products herein. CCS Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does CCS Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. CCS Semiconductor does not convey any license under its patent rights nor the rights of others.