



■ Features

- High collector to emitter voltage: $V_{CE0} > 120V$.

SOT-89

Unit:mm

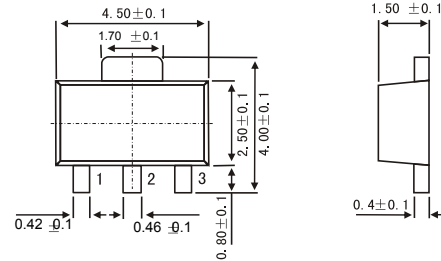

- 1.Base
- 2.Collector
- 3.Emitter

■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Collector-base voltage	V_{CB0}	120	V
Collector-emitter voltage	V_{CE0}	120	V
Emitter-base voltage	V_{EB0}	5	V
Collector current	I_c	0.7	A
Collector current (pulse) *	$I_c (pu)$	1.2	A
Collector power dissipation	P_c	2	W
Junction temperature	T_j	150	$^\circ C$
Storage temperature	T_{stg}	-55 to +150	$^\circ C$







*. $PW \leq 10ms$, duty cycle $\leq 50\%$

■ Electrical Characteristics $T_a = 25^\circ C$




Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V_{CB0}	$I_c = 100 \mu A, I_E = 0$	120			V
Collector- emitter breakdown voltage	V_{CE0}	$I_c = 1 mA, I_B = 0$	120			
Emitter - base breakdown voltage	V_{EB0}	$I_E = 100 \mu A, I_c = 0$	5			
Collector-base cut-off current	I_{CB0}	$V_{CB} = 120 V, I_E = 0$			0.1	μA
Emitter cut-off current	I_{EB0}	$V_{EB} = 5V, I_c = 0$			0.1	
Collector-emitter saturation voltage *	$V_{CE(sat)}$	$I_c = 500 mA, I_B = 50mA$			0.6	V
Base - emitter saturation voltage *	$V_{BE(sat)}$	$I_c = 500 mA, I_B = 50mA$			1.5	
Base - emitter voltage *	V_{BE}	$V_{CE} = 10V, I_c = 10mA$	0.55		0.68	
DC current gain *	h_{FE}	$V_{CE} = 1V, I_c = 5mA$	45	200		
		$V_{CE} = 1V, I_c = 100mA$	90	200	400	
Collector output capacitance	C_{ob}	$V_{CB} = 10V, I_E = 0, f = 1MHz$		10		pF
Transition frequency	f_T	$V_{CE} = 10V, I_c = 10mA$		90		MHz

*. $PW \leq 350us$, duty cycle $\leq 2\%$

Typical Characteristics

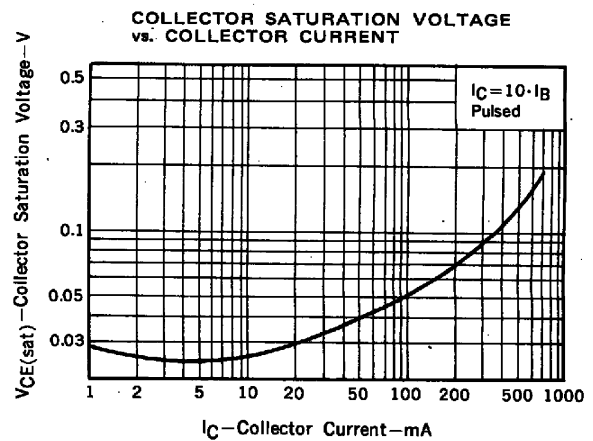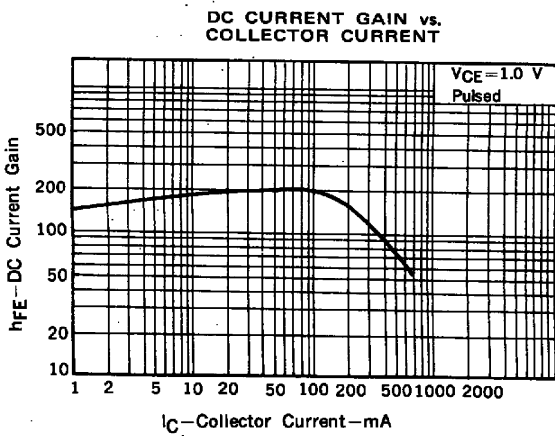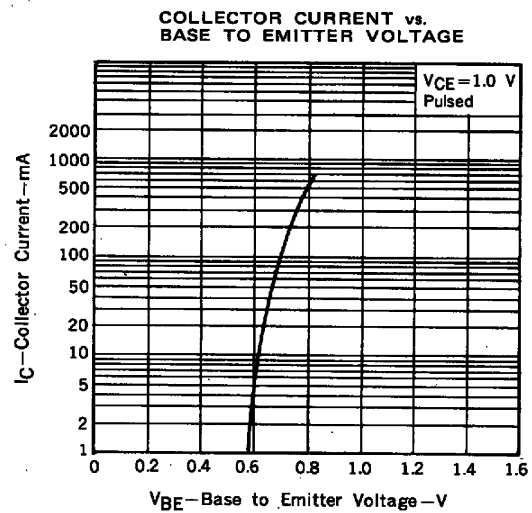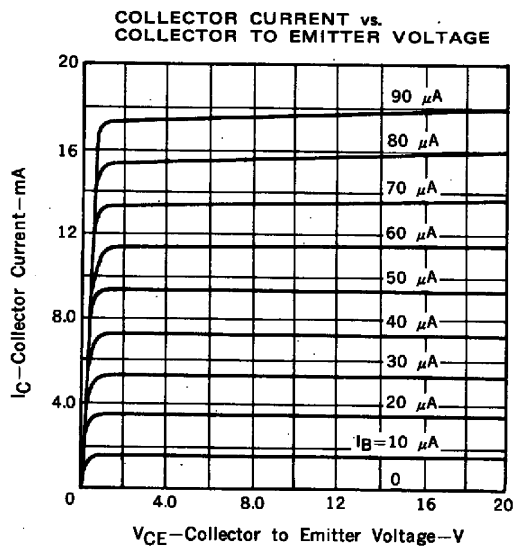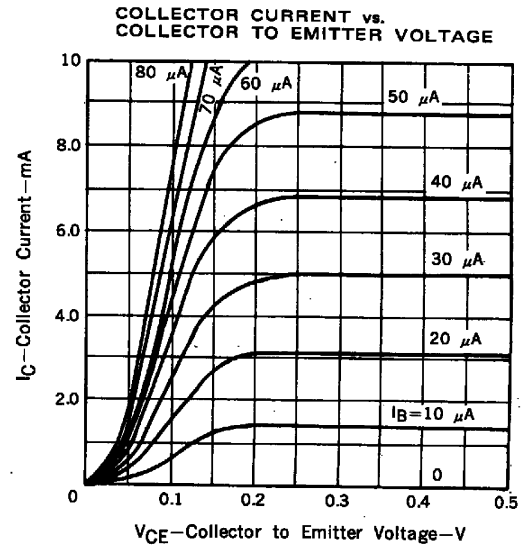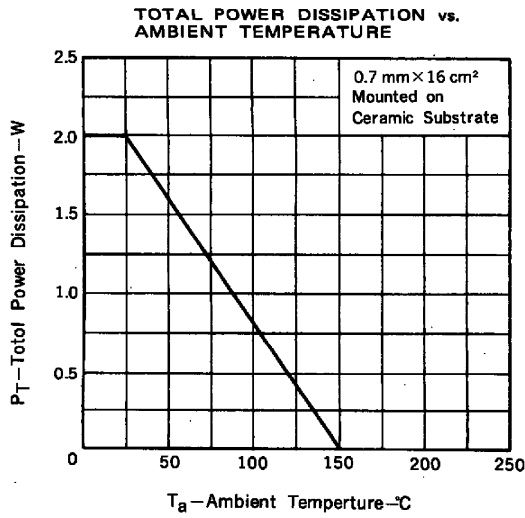

■ Typical Characteristics

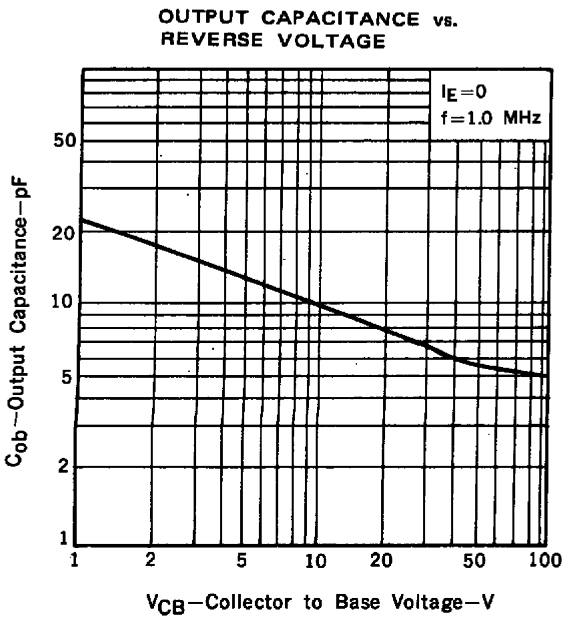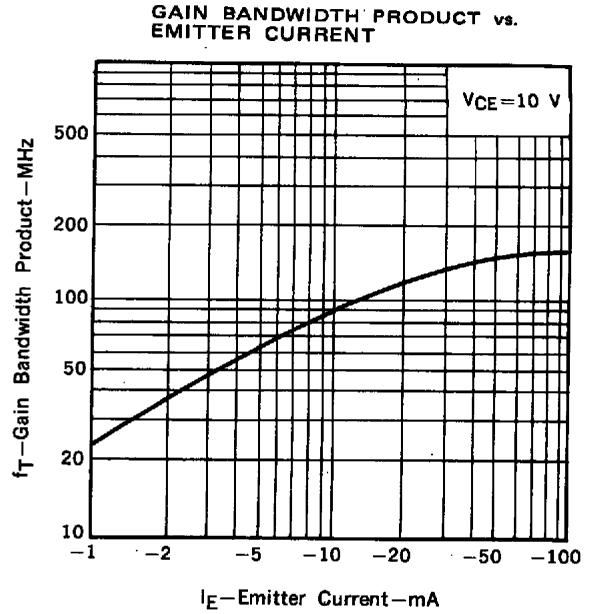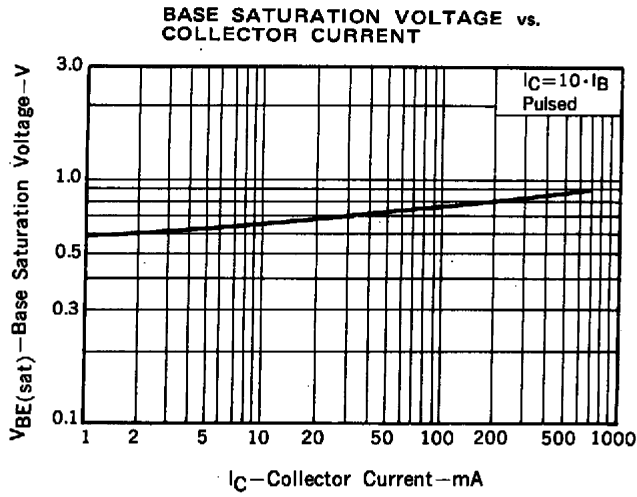

CCS Semiconductor and **ese**mi are trademarks of Semiconductor Components Industries. CCS Semiconductor reserves the right to make changes without further notice to any products herein. CCS Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does CCS Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. CCS Semiconductor does not convey any license under its patent rights nor the rights of others.