

CSM7002S23

60V N-Channel Enhancement Mode MOSFET – ESD Protected


Voltage 60 V **Current** 200mA

Features

- $R_{DS(ON)}$, $V_{GS}@10V$, $I_D@500mA < 2.5\Omega$
- $R_{DS(ON)}$, $V_{GS}@4.5V$, $I_D@200mA < 3\Omega$
- Advanced Trench Process Technology
- High Density Cell Design For Ultra Low On-Resistance
- Very Low Leakage Current In Off Condition
- Specially Designed for Battery Operated Systems, Solid-State Relays Drivers: Relay, Displays, Memories, etc
- ESD Protected 2KV HBM
- Lead free in compliance with EU RoHS 2.0

Mechanical Data

- Case: SOT-23 Package
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0003 ounces, 0.0084 grams

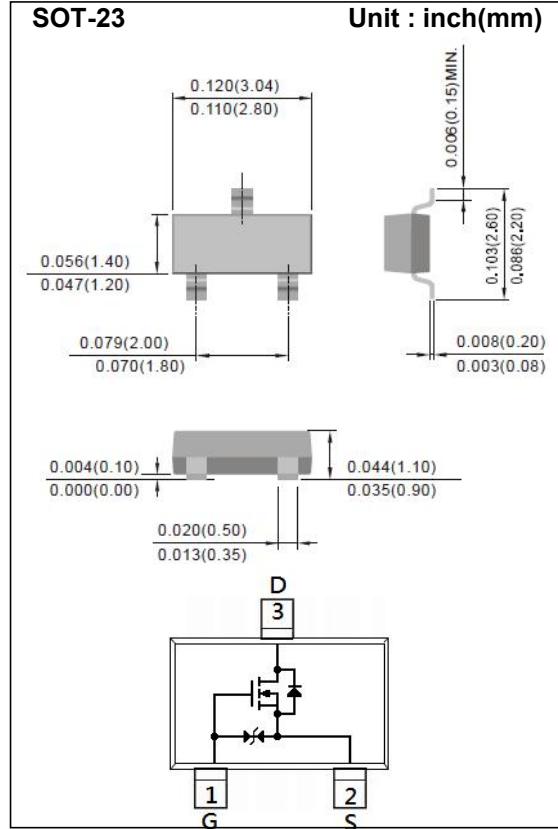

Maximum Ratings and Thermal Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER		SYMBOL	LIMIT	UNITS
Drain-Source Voltage		V_{DS}	60	V
Gate-Source Voltage		V_{GS}	+20	
Continuous Drain Current (Note 4)		I_D	200	mA
Pulsed Drain Current (Note 1)		I_{DM}	2000	
Power Dissipation	$T_A=25^\circ\text{C}$	P_D	500	mW
	Derate above 25°C		4	mW/°C
Operating Junction and Storage Temperature Range		T_J, T_{STG}	-55~150	°C
Typical Thermal Resistance Junction to Ambient (Note 3,4)		$R_{\theta JA}$	250	°C/W

CSM7002S23

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Static						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=10\mu A$	60	-	-	V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	1	-	2.5	
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=500mA$	-	-	2.5	Ω
		$V_{GS}=4.5V, I_D=200mA$	-	-	3	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=60V, V_{GS}=0V$	-	-	1	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$	-	-	± 10	
Forward Transconductance	g_{fs}	$V_{DS}=15V, I_D=250mA$	100	-	-	mS
Dynamic (Note 5)						
Total Gate Charge	Q_g	$V_{DS}=15V, I_D=250mA,$ $V_{GS}=5V$ (Note 1,2)	-	0.8	-	nC
Gate-Source Charge	Q_{gs}		-	0.35	-	
Gate-Drain Charge	Q_{gd}		-	0.2	-	
Input Capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=0V,$ $f=1MHz$	-	35	-	pF
Output Capacitance	C_{oss}		-	13	-	
Reverse Transfer Capacitance	C_{rss}		-	8	-	
Turn-On Delay Time	$t_{d(on)}$	$V_{DD}=30V, I_D=200mA,$ $V_{GS}=10V,$ $R_G=10\Omega$ (Note 1,2)	-	2.7	-	ns
Turn-On Rise Time	t_r		-	19	-	
Turn-Off Delay Time	$t_{d(off)}$		-	15	-	
Turn-Off Fall Time	t_f		-	23	-	
Drain-Source Diode						
Maximum Continuous Drain-Source Diode Forward Current	I_S	---	-	-	300	mA
Diode Forward Voltage	V_{SD}	$I_S=200mA, V_{GS}=0V$	-	0.82	1.3	V

NOTES:

1. Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$.
2. Essentially independent of operating temperature typical characteristics.
3. $R_{\theta JA}$ is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins mounted on a 1 inch FR-4 with 2oz. square pad of copper.
4. The maximum current rating is package limited.
5. Guaranteed by design, not subject to production testing.

CSM7002S23

TYPICAL CHARACTERISTIC CURVES

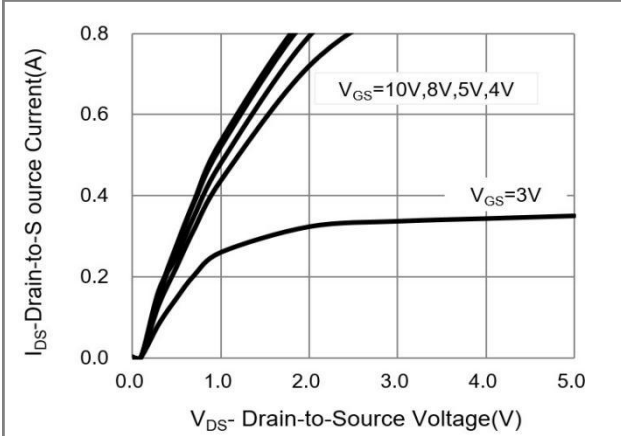


Fig.1 On-Region Characteristics

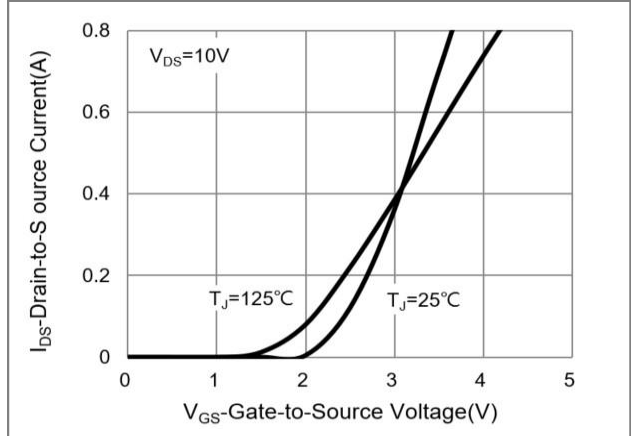


Fig.2 Transfer Characteristics

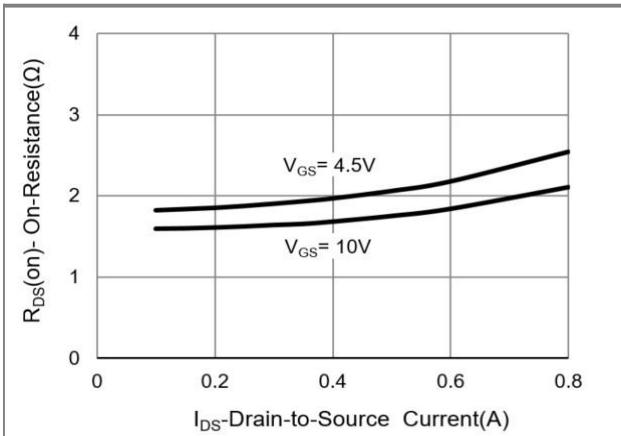


Fig.3 On-Resistance vs. Drain Current

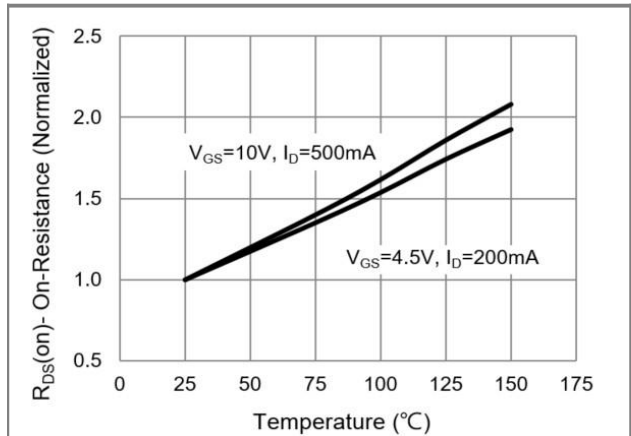


Fig.4 On-Resistance vs. Junction temperature

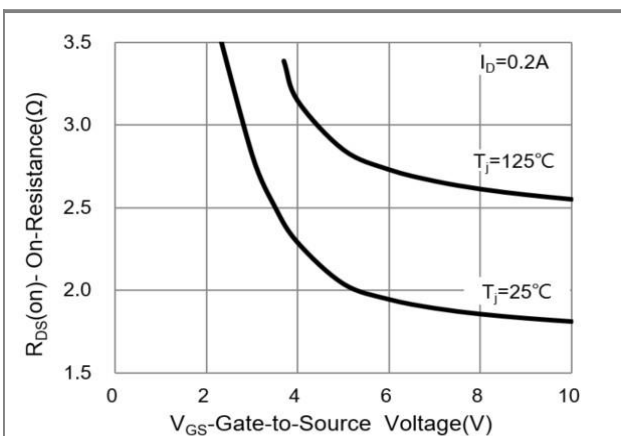


Fig.5 On-Resistance Variation with V_{GS}

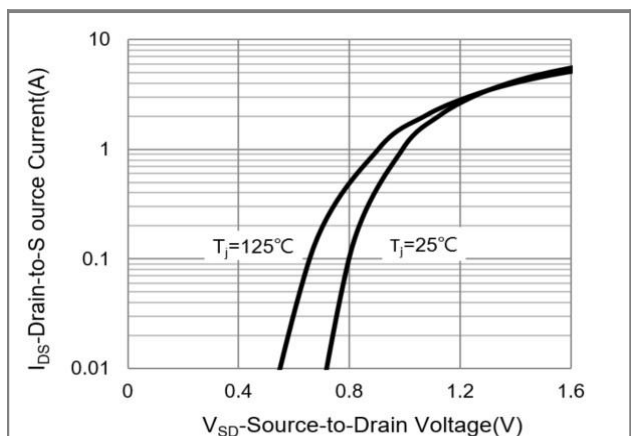


Fig.6 Body Diode Characteristics

CSM7002S23

TYPICAL CHARACTERISTIC CURVES

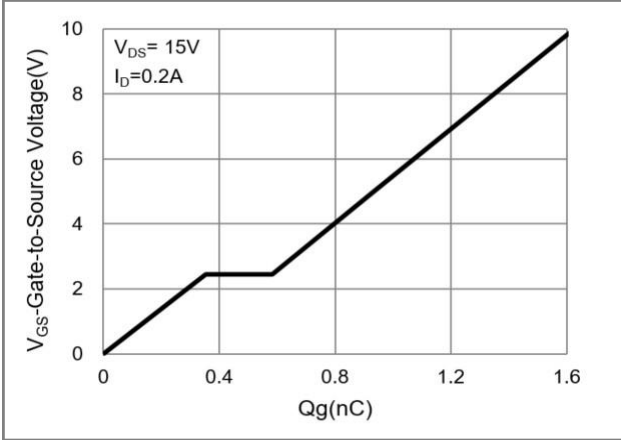


Fig.7 Gate-Charge Characteristics

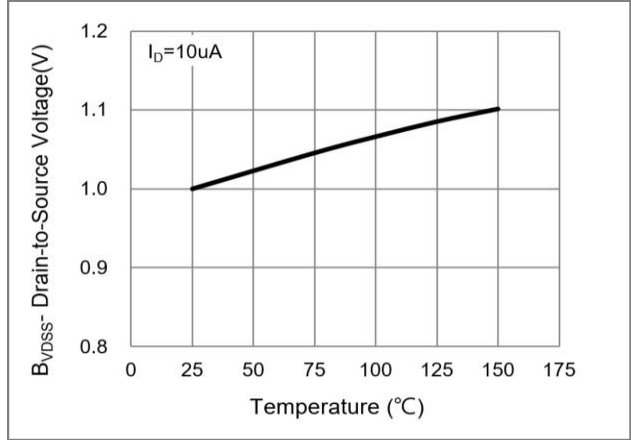


Fig.8 Breakdown Voltage Variation vs. Temperature

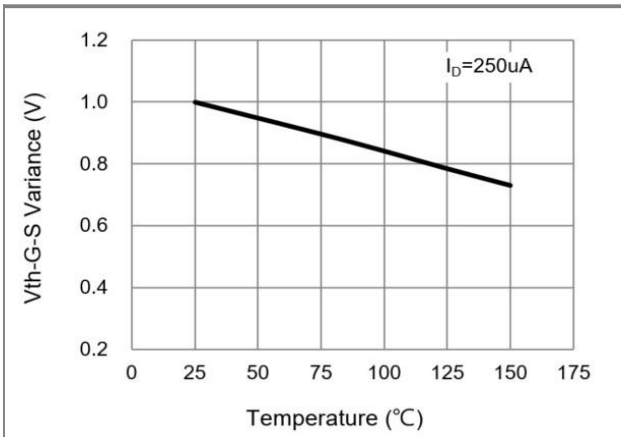


Fig.9 Threshold Voltage Variation with Temperature


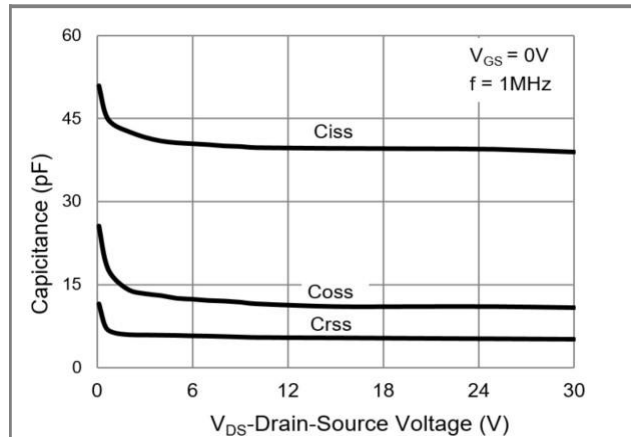


Fig.10 Capacitance vs. Drain-Source Voltage

CSM7002S23

Mounting Pad Layout

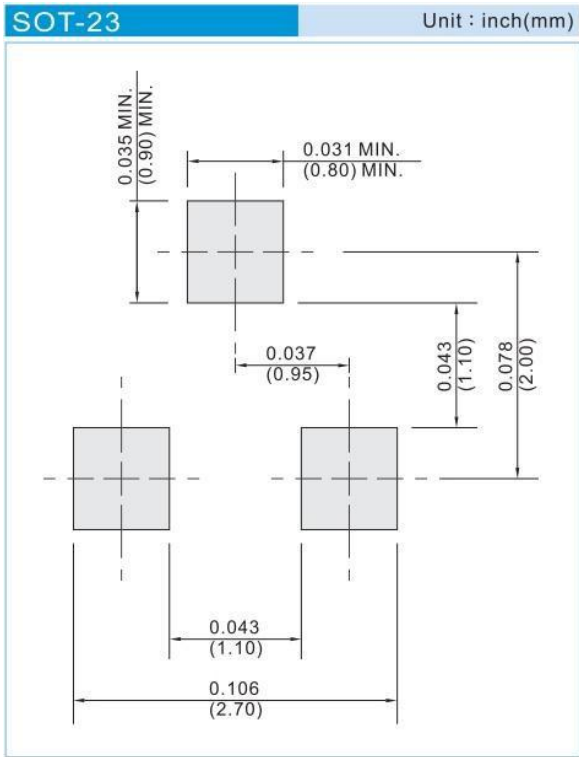

CSM7002S23

Notice

Specifications of the products displayed herein are subject to change without notice. CCS or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in CCS terms and conditions of sale for such products, CCS assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of CCS products including liability or warranties relating to fitness for a particular purpose, merchant ability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications.

Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CCS for any damages resulting from such improper use or sale.