

### Features

- 500 Watts Peak Pulse Power per Line ( $t_p = 8/20\mu s$ )
- Bidirectional Configuration
- Protects One Power or I/O Port
- ESD Protection > 40 kilovolts
- Low Clamping Voltages
- Ultra Low Capacitance: 1.0 pF Typical

### IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD)  $\pm 15kV$  (air),  $\pm 8kV$  (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5(Surge): 20A, 8/20 $\mu s$




### Mechanical Characteristics

- Molded JEDEC SOD-323 package
- Weight 10 milligrams (Approximate)
- Flammability rating UL 94V-0
- 8mm Tape and Reel Per EIA Standard 481
- RoHS Compliant

### Applications

- Ethernet - 10/100/1000 Base T
- Cellular Phones
- Handheld - Wireless Systems
- Personal Digital Assistant (PDA)
- USB Interface

### PIN Configuration

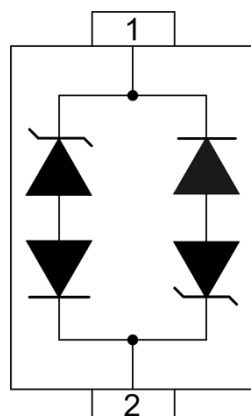

**BIDIRECTIONAL**


## Transient Voltage Suppressor

### Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ( $t_p=8/20\mu s$ ) - See Figure 1	$P_{PP}$	500	Watts
Operating Temperature	$T_J$	-55 to + 150	°C
Storage Temperature	$T_{STG}$	-55 to +150	°C

### Electrical Parameters (T=25°C)

Symbol	Parameter
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Maximum Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$

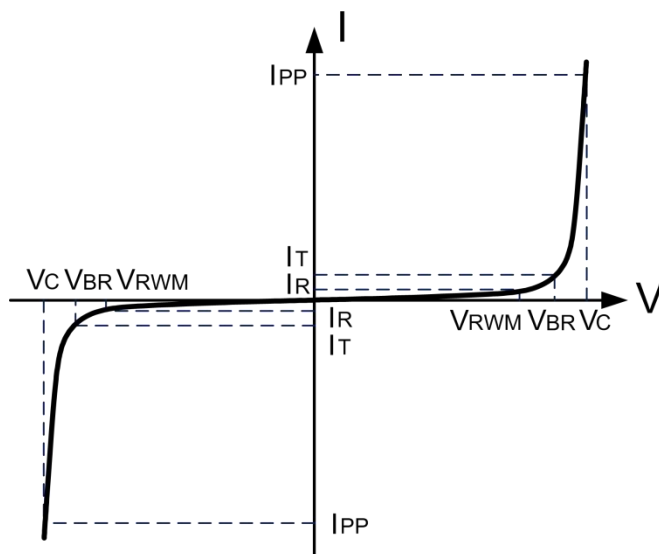

### Electrical characteristics

PART NUMBER (See Note 1 & Note 2)	RATED STAND-OFF VOLTAGE $V_{WM}$ (Volts)	MINIMUM BREAKDOWN VOLTAGE @ 1mA $V_{BR}$ (Volts)	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ $I_P = 1A$ $V_C$ (Volts)	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ $8/20\mu s$ $V_C$ @ $I_{PP}$	MAXIMUM LEAKAGE CURRENT @ $V_{WM}$ $I_d$ ( $\mu A$ )	TYPICAL CAPACITANCE @ 0V, 1 MHz C(pF)
CSE8.0BLS323	8.0	8.5	13.4	26.8V @ 20.0A	1	1


**Note 1:** Part numbers with an additional "B" suffix are bidirectional devices

**Note 2:** For Bidirectional Devices Only: Electrical characteristics apply in both directions.


## Transient Voltage Suppressor

### Typical Characteristics


**Figure 1: Peak Pulse Power vs. Pulse Time**

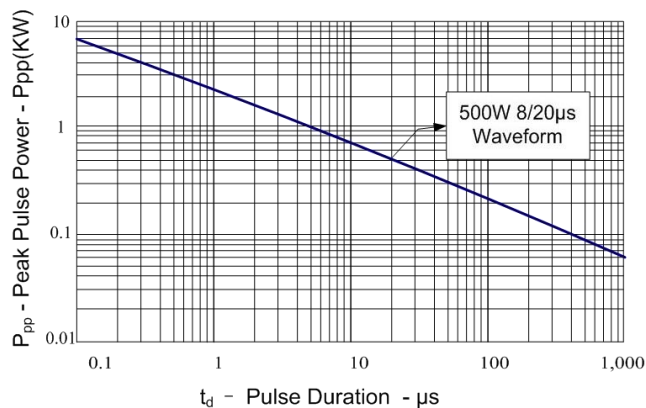


**Figure 2: Power Derating Curve**

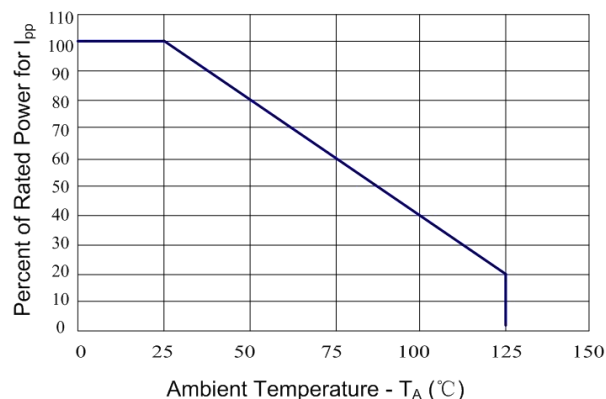


**Figure 3: Clamping Voltage vs. Peak Pulse Current**

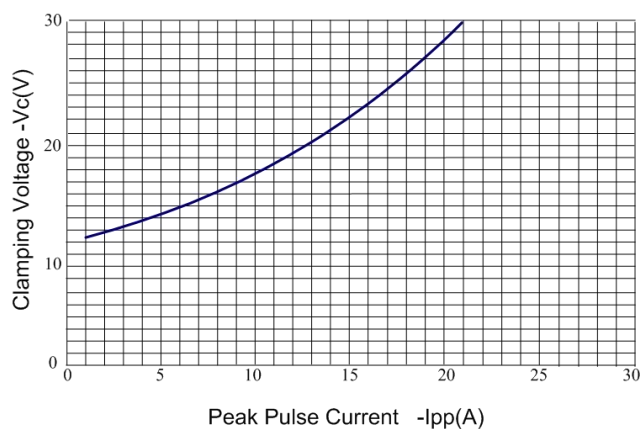


**Figure 4: Normalized Junction Capacitance vs. Reverse Voltage**

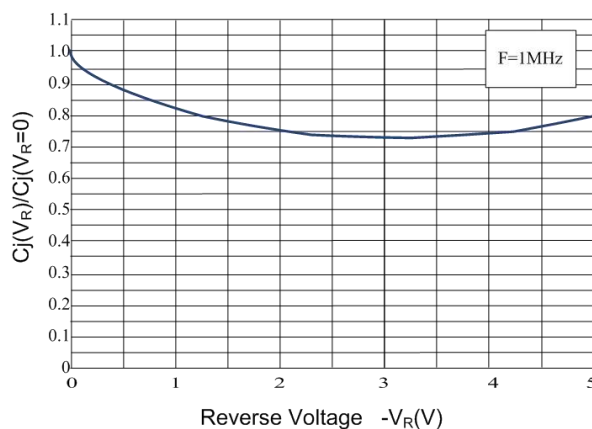



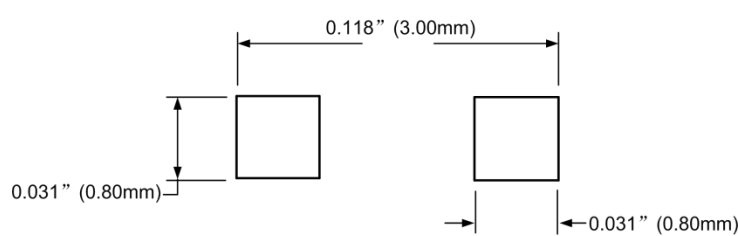
**Figure 5: Pulse Waveform**

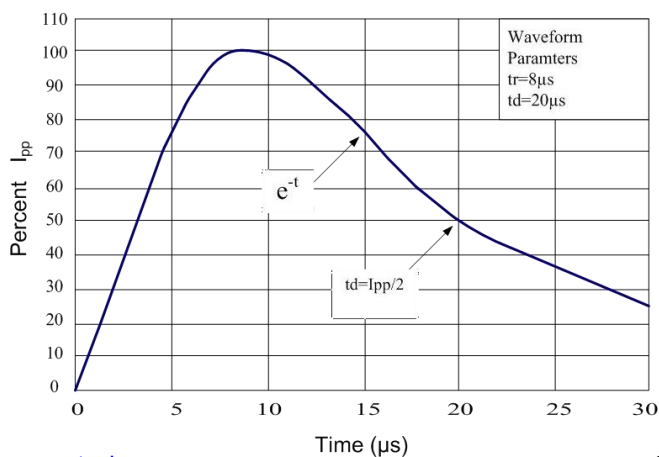

**Figure 6: ESD Clamping( 8kV Contact per IEC 61000-4-2)**

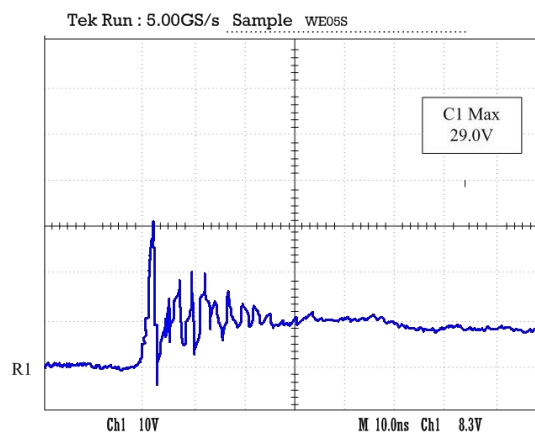

### Outline Drawing – SOD-323
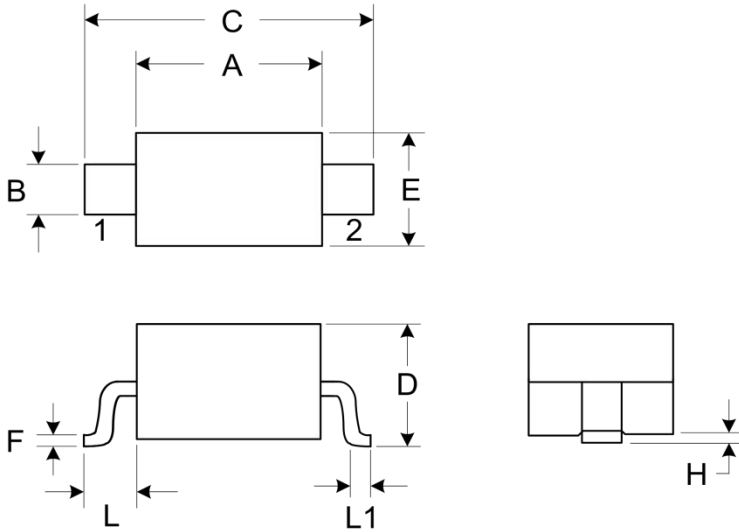
<div>PACKAGE OUTLINE</div> <div></div>	<div></div> <div>SOD-323</div>																																																						
	<div>DIMENSIONS</div> <table><tr><th rowspan="2">SYMBOL</th><th colspan="2">MILLIMETER</th><th colspan="2">INCHES</th></tr><tr><th>MIN</th><th>MAX</th><th>MIN</th><th>MAX</th></tr><tr><td>A</td><td>1.60</td><td>1.80</td><td>0.063</td><td>0.071</td></tr><tr><td>B</td><td>0.25</td><td>0.35</td><td>0.010</td><td>0.014</td></tr><tr><td>C</td><td>2.50</td><td>2.70</td><td>0.098</td><td>0.106</td></tr><tr><td>D</td><td>0.00</td><td>1.00</td><td>0.000</td><td>0.039</td></tr><tr><td>E</td><td>1.20</td><td>1.40</td><td>0.047</td><td>0.055</td></tr><tr><td>F</td><td>0.08</td><td>0.15</td><td>0.003</td><td>0.006</td></tr><tr><td>L</td><td colspan="2">0.475 REF</td><td colspan="2">0.019REF</td></tr><tr><td>L1</td><td>0.25</td><td>0.40</td><td>0.010</td><td>0.016</td></tr><tr><td>H</td><td>0.00</td><td>0.10</td><td>0.000</td><td>0.004</td></tr></table>	SYMBOL	MILLIMETER		INCHES		MIN	MAX	MIN	MAX	A	1.60	1.80	0.063	0.071	B	0.25	0.35	0.010	0.014	C	2.50	2.70	0.098	0.106	D	0.00	1.00	0.000	0.039	E	1.20	1.40	0.047	0.055	F	0.08	0.15	0.003	0.006	L	0.475 REF		0.019REF		L1	0.25	0.40	0.010	0.016	H	0.00	0.10	0.000	0.004
	SYMBOL		MILLIMETER		INCHES																																																		
MIN		MAX	MIN	MAX																																																			
A	1.60	1.80	0.063	0.071																																																			
B	0.25	0.35	0.010	0.014																																																			
C	2.50	2.70	0.098	0.106																																																			
D	0.00	1.00	0.000	0.039																																																			
E	1.20	1.40	0.047	0.055																																																			
F	0.08	0.15	0.003	0.006																																																			
L	0.475 REF		0.019REF																																																				
L1	0.25	0.40	0.010	0.016																																																			
H	0.00	0.10	0.000	0.004																																																			
<div>MOUNTING PAD</div> <div></div>	<div>Notes</div> <div><div>1. Controlling Dimensions in Millimeters.</div><div>2. Dimensions are exclusive of mold flash and metal burrs.</div></div>																																																						

### Package Information

Qty: 3k/Reel

### Notice

Specifications of the products displayed herein are subject to change without notice. CCS or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in CCS terms and conditions of sale for such products, CCS assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of CCS products including liability or warranties relating to fitness for a particular purpose, merchant ability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications.

Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CCS for any damages resulting from such improper use or sale.