

Features

- low Capacitance 15pF
- Low Clamping Voltage
- Small Body Outline Dimensions: 0.039"×0.024"
(1.0 mm×0.60 mm)
- Low Body Height: 0.019"(0.5 mm)
- Stand-off Voltage: 24V
- Low Leakage
- Response Time is Typically < 1 ns
- IEC61000-4-2 Level 4 ESD Protection for data lines
- These are Pb-Free Devices



DFN1006-2L



Applications

- 10/100/1000 Mb/s Ethernet
- FireWire
- Display ports
- MDDI ports
- Digital Visual Interface (DVI)
- Cellular handsets & accessories
- Computer and peripherals

Maximum Rating @ Ta=25°C unless otherwise specified


Symbol	Parameter		Ratings	Units
ESD	IEC 61000-4-2 (HBM-ESD)	Contact	15	KV
		Air	25	
T _L	Lead Soldering Temperature		260(10sec.)	°C
T _J	Operating Temperature		-55 to +125	°C
T _{STG}	Storage Temperature		-55 to +150	°C

Electrical Characteristics@ Ta=25°C unless otherwise


Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
V_{RWM}	Reverse Working Voltage				24	V
V_{BR}	Reverse Breakdown Voltage	$I_R = 1mA$,	26.7		31.8	V
I_R	Reverse Leakage Current	$V_{RWM} = 24V$			1	μA
V_C	Clamping Voltage	$I_{PP} = 1A$, $t_p = 8/20\mu s$			44	V
		$I_{PP} = 3A$, $t_p = 8/20\mu s$			64	V
C_J	Junction Capacitance	$V_R = 0V$, $f = 1MHz$			15	pF

Typical Characteristics@ Ta=25°C unless otherwise specified



Non-Repetitive Peak Pulse Power vs. Pulse Time

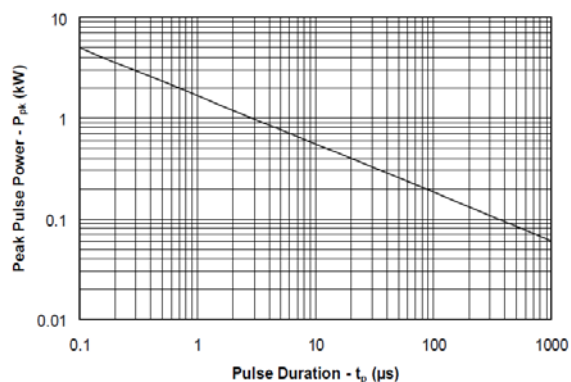

Power Derating Curve

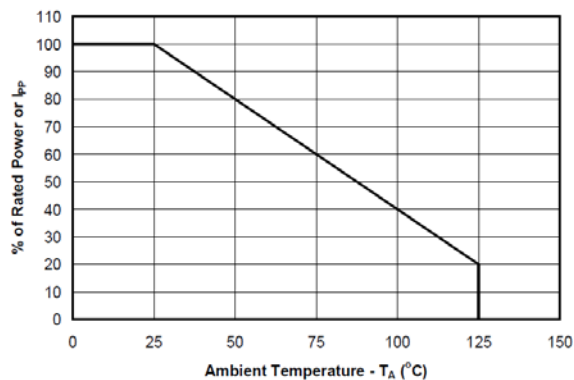


Pulse Waveform

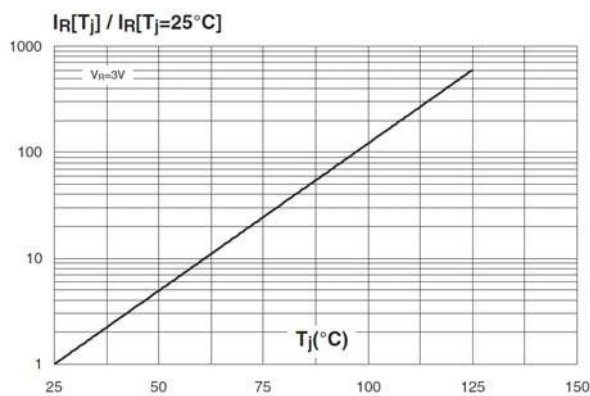
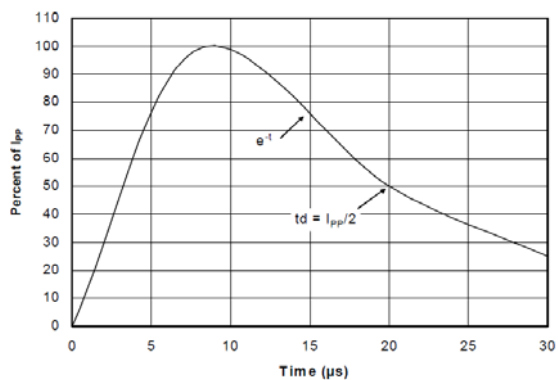


Soldering Parameters

Reflow Condition		Fb – Free assembly
Pre Heat	- Temperature Min ($T_{s(\text{Min})}$)	150°C
	- Temperature Max ($T_{s(\text{Max})}$)	200°C
	- Time (Min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus) Temp (T_L) to peak		3°C/second Max
$T_{s(\text{Max})}$ to T_L - Ramp-up Rate		3°C/second Max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_p)		250 ± 0.5 °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second Max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		260°C

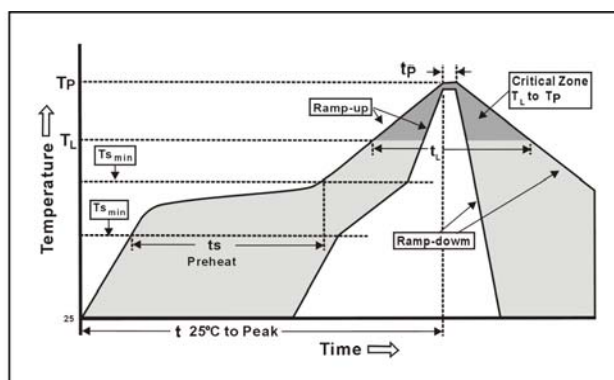

Package Outline

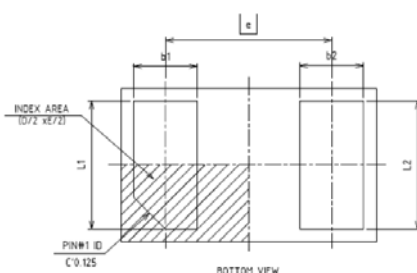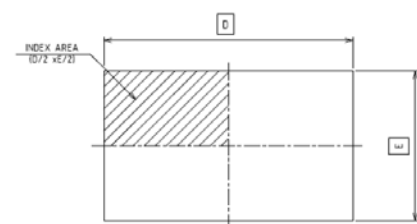

Symbol	Dimensions in mm		
	Min	Nom	Max
A	0.450	0.500	0.550
A1	0.000	0.002	0.050
D	0.950	1.000	1.050
E	0.550	0.600	0.650
e		0.650	
b1	0.200	0.250	0.300
b2	0.200	0.250	0.300
L1	0.450	0.500	0.550
L2	0.450	0.500	0.550

CCS Semiconductor and are trademarks of Semiconductor Components Industries, CCS Semiconductor reserves the right to make changes without further notice to any products herein. CCS Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does CCS Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. CCS Semiconductor does not convey any license under its patent rights nor the rights of others.