
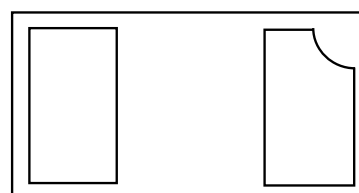


■ Feature

- 100W peak pulse power per line ($t_P = 8/20\mu s$)
- DFN1006-2L package
- Replacement for MLV(0402)
- Bidirectional configurations
- Response time is typically $< 1ns$
- Low clamping voltage
- RoHS compliant
- Transient protection for data lines to
IEC61000-4-2(ESD) $\pm 15KV$ (air), $\pm 8KV$ (contact);
IEC61000-4-4 (EFT) 40A (5/50ns)



■ Mechanical Characteristics

- Lead finish: 100% matte Sn(Tin)
- Mounting position: Any
- Qualified max reflow temperature: $260^{\circ}C$
- Device meets MSL 1 requirements
- Pure tin plating: $7 \sim 17 \mu m$
- Pin flatness: $\leq 3mil$


■ Applications

- Cellular phones
- Portable devices
- Digital cameras
- Power supplies

■ Simplified outline(DFN1006-2L)

■ Electronics Parameter

Symbol	Parameter
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
P_{PP}	Peak Pulse Power
C_J	Junction Capacitance
I_F	Forward Current
V_F	Forward Voltage @ I_F






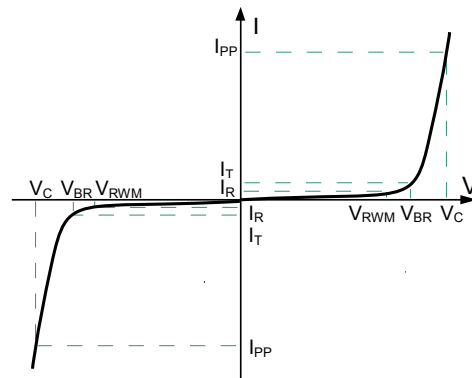


■ Electrical characteristics per line@25°C (unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Peak Reverse Working Voltage	V_{RWM}				5	V
Breakdown Voltage	V_{BR}	$I_t = 1\text{mA}$	5.6		8.5	V
Reverse Leakage Current	I_R	$V_{RWM} = 5\text{V}$ $T=25^\circ\text{C}$			1.0	μA
Maximum Reverse Peak Pulse Current	I_{PP}			5.5		A
Clamping Voltage	V_C	$I_{PP}=1\text{A}$			10	V
Clamping Voltage	V_C	$I_{PP}=3\text{A}$			15	V
Clamping Voltage	V_C	$I_{PP}=5\text{A}$			21	V
Junction Capacitance	C_j	$V_R=0\text{V}$ $f = 1\text{MHz}$		0.3		pF


■ Absolute maximum rating@25 °C

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p=8/20\mu\text{s}$)	P_{pp}	100	W
Operating Temperature	T_J	-55 to +150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 to +150	$^\circ\text{C}$

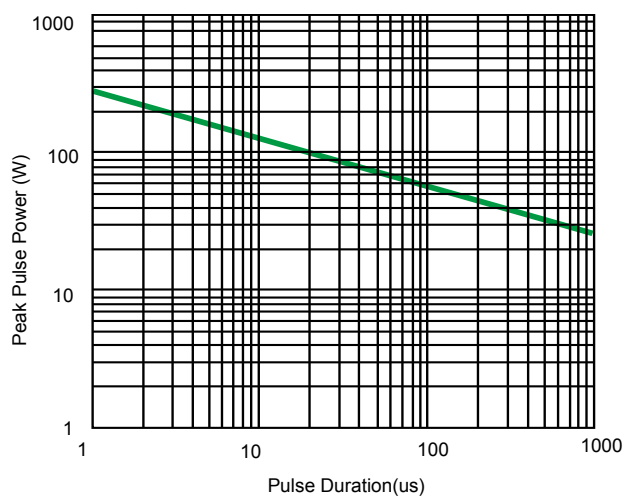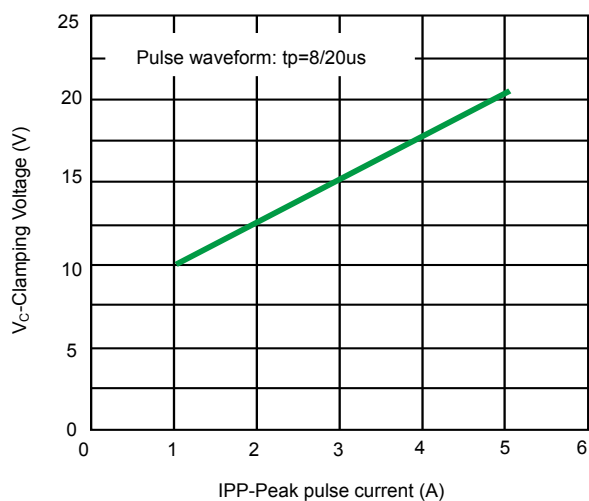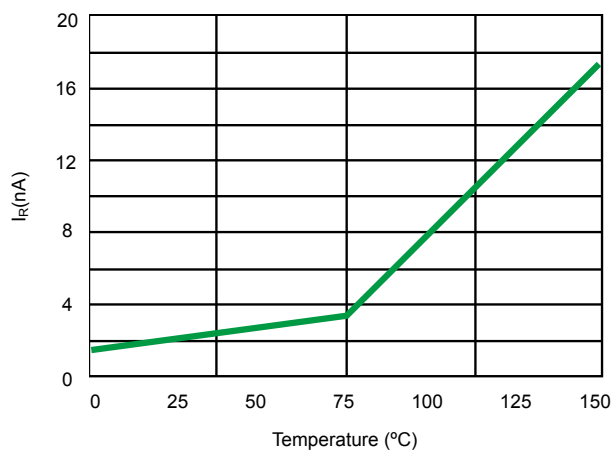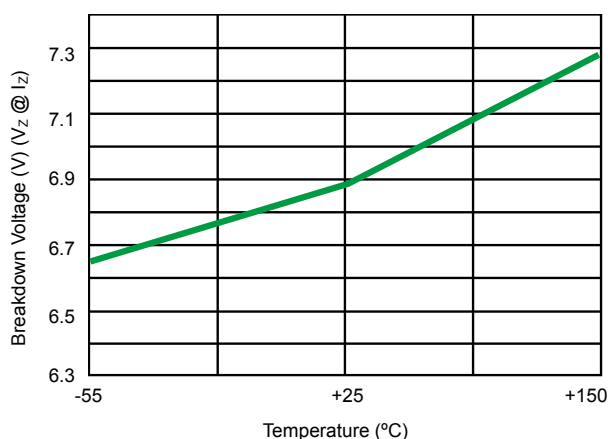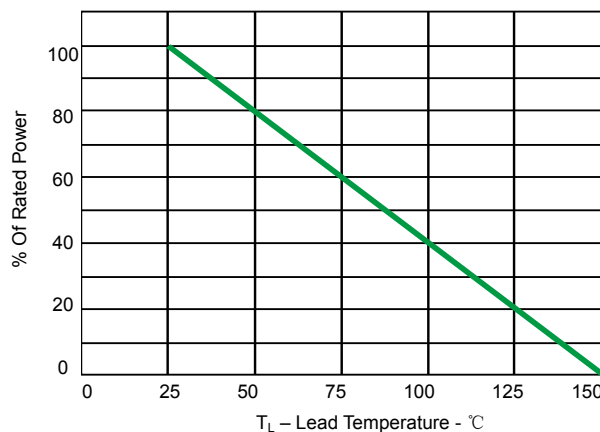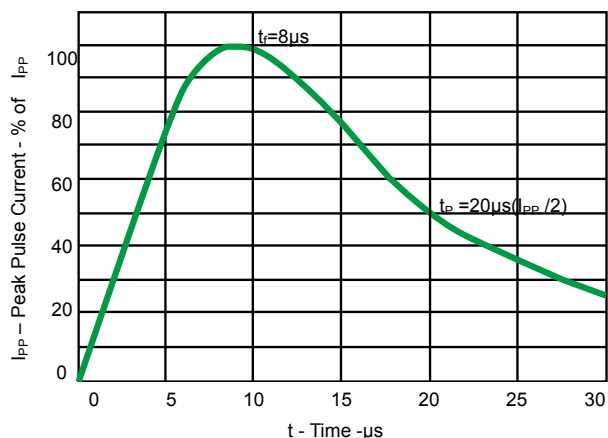


■ Solder Reflow Recommendation

Peak Temp=257°C, Ramp Rate=0.802deg. °C/sec

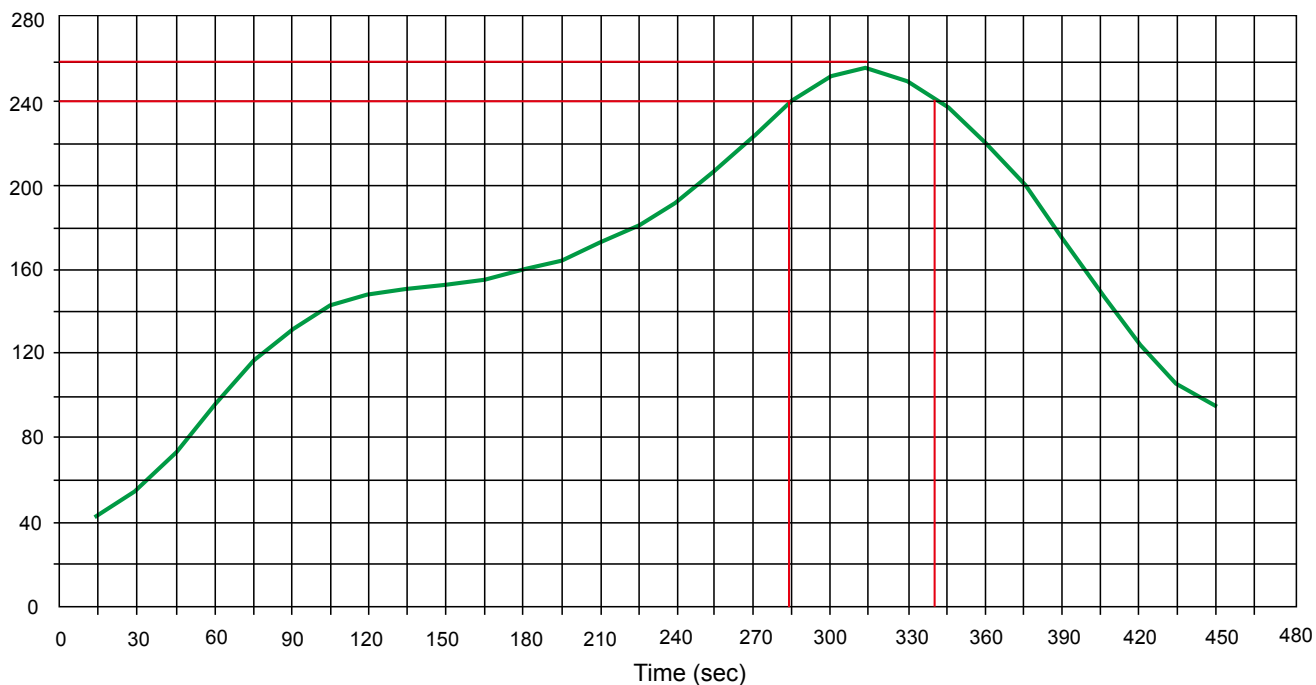

Package Outline

DFN1006-2L

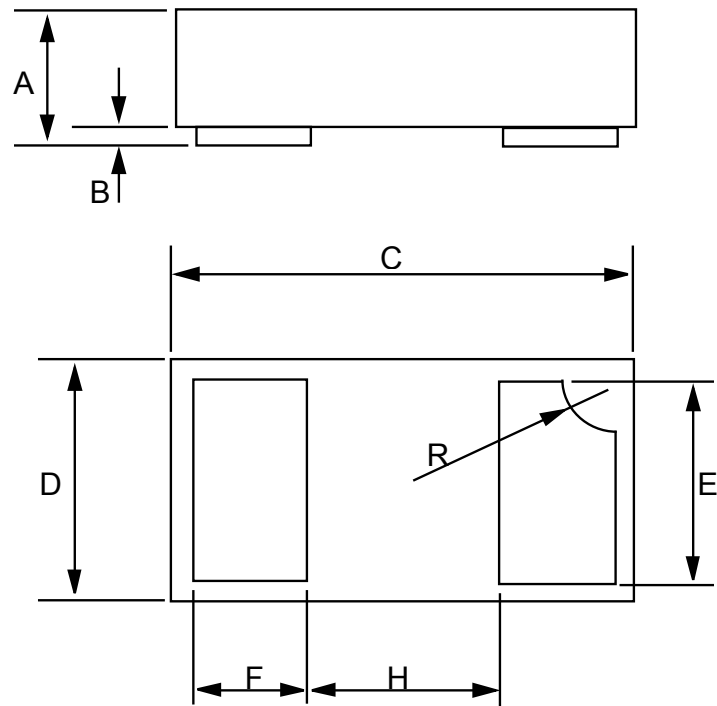

Dim	Inches		Millimeters	
	MIN	MAX	MIN	MAX
A	0.013	0.015	0.34	0.40
B	0.000	0.002	0.00	0.05
C	0.037	0.042	0.95	1.075
D	0.021	0.026	0.55	0.675
E	0.017	0.021	0.45	0.55
F	0.007	0.011	0.20	0.30
H	0.015Typ.		0.40Typ.	
R	0.001	0.005	0.05	0.15