


Features


- 180 Watts Peak Pulse Power per Line ($t_p=8/20\mu s$)
- Protects Four Uidirectional I/O Lines
- Low Clamping Voltage
- Working Voltages : 5.0V
- Low Leakage Current



Applications

- Ethernet Interface
- Switchin Systems
- Access Equipment
- Central Office Equipment
- Customer Premise Equipment
- Microcontroller Input Protection

SOT-26

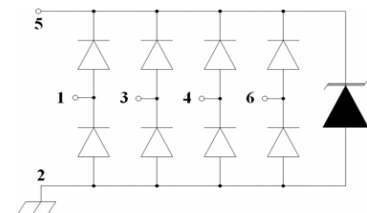

Mechanical Characteristics

- Package: SOT-26
- Lead Finish: Lead Free
- UL Flammability Classification Rating 94V-0
- Quantity Per Reel:3,000pcs
- Reel Size:7inch

Absolute Maximum Ratings($T_{amb}=25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	Ppp	180	W
ESD per IEC 61000-4-2 (Air)	V _{ESD}	± 25	Kv
ESD per IEC 61000-4-2 (Contact)		± 15	
Operating Temperature Range	T _J	-55 to +125	$^{\circ}C$
Storage Temperature Range	T _{STJ}	-55 to +150	$^{\circ}C$

Electrical Characteristics (TA=25°C unless otherwise specified)

Part Number	V _{RWM} (V)	V _{BR} (V)	I _T (mA)	V _C @1A	V _C		I _R μA (Max)	C (Pf) (Typ.)
					(Max)	(@A)		
UESD6V8V4C	5	6	1	9.8	15	12	1	3

Characteristic Curves

Fig1 8/20μs Pulse Waveform

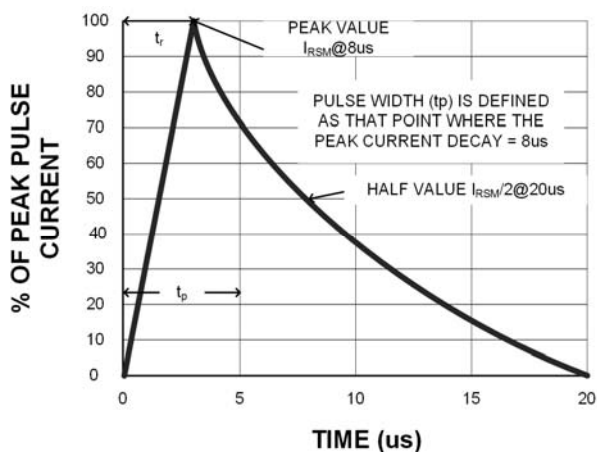


Fig2. ESD Pulse Waveform (according to IEC 61000 4 2)



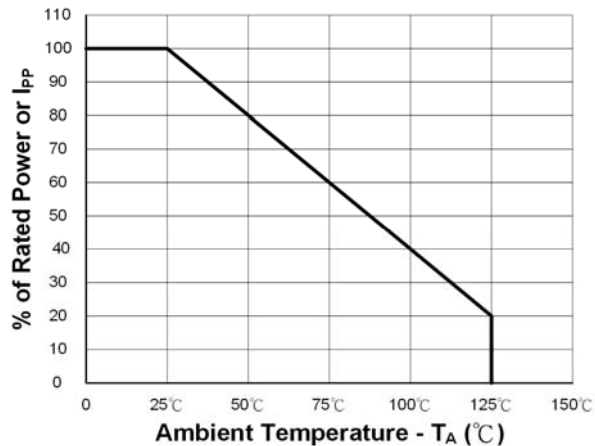


Fig3. Power Derating Curve

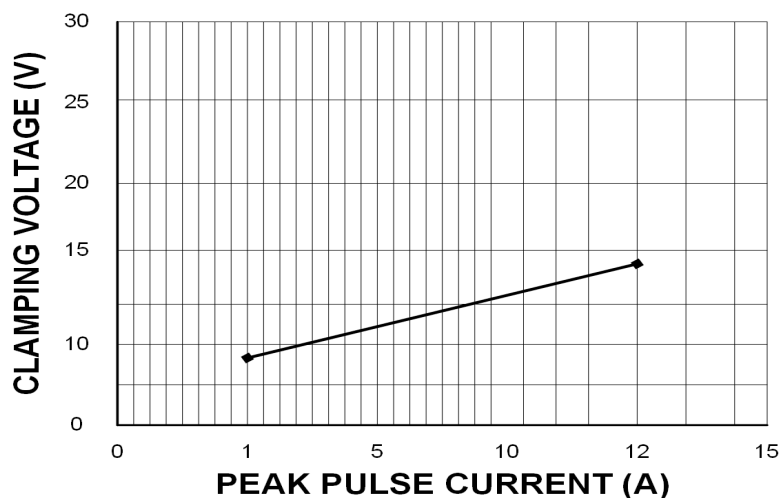


LAYOUT DIAGRAM

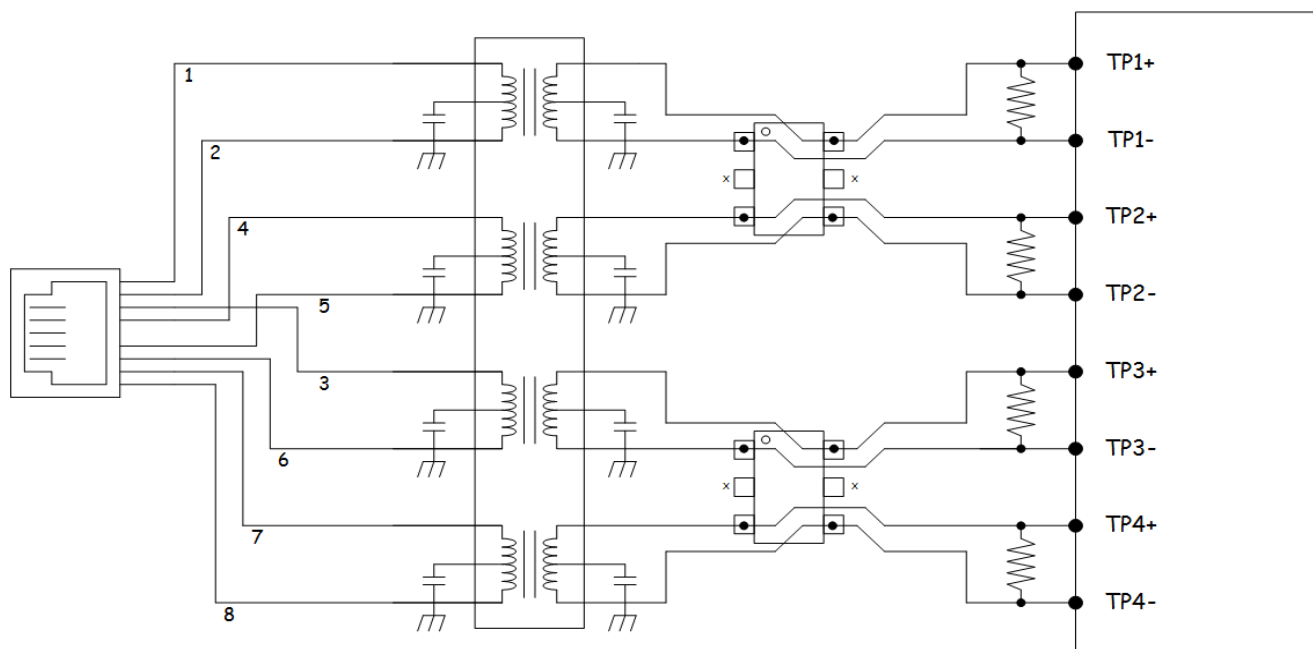


10/1000 Ethernet Layout Diagram

SOT-26 Package Outline & Dimensions

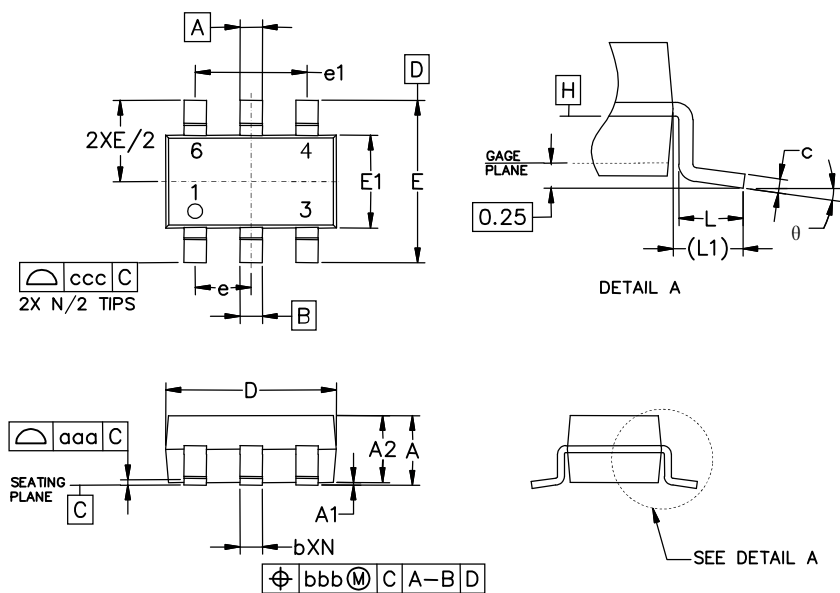

Symbol	Inches			Millimeters		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	0.035	-	0.057	0.90	-	1.45
A1	0.000	-	0.006	0.00	-	0.15
A2	0.035	0.045	0.051	0.90	1.15	1.30
b	0.010	-	0.020	0.25	-	0.50
c	0.003	-	0.009	0.08	-	0.22
D	0.110	0.114	0.122	2.80	2.90	3.10
E1	0.060	0.063	0.069	1.50	1.60	1.75
E	0.110 BSC			2.80 BSC		
e	0.037 BSC			0.95 BSC		
e1	0.075 BSC			1.90 BSC		
L	0.012	0.018	0.024	0.30	0.45	0.60
L1	(0.024)			(0.60)		
θ	0°	-	10°	0°	-	10°
aaa	0.004			0.10		
bbb	0.008			0.20		
ccc	0.008			0.20		

Soldering Footprint



Symbol	Inches	Millimeters
C	(0.098)	(2.50)
G	0.055	1.40
P	0.037	0.95
X	0.024	0.60
Y	0.043	1.10
Z	0.141	3.60