


### Features


- Ultra low leakage: nA level
- Operating voltage: 5V
- Low clamping voltage
- Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test
    - Air discharge:  $\pm 15\text{kV}$
    - Contact discharge:  $\pm 8\text{kV}$
  - IEC61000-4-4 (EFT) 40A (5/50ns)
  - IEC61000-4-5 (Lightning) 5A (8/20 $\mu\text{s}$ )
- RoHS Compliant



**SOT-363**

### Applications

- USB 2.0 power and data line
- Set-top box and digital TV
- Digital video interface (DVI)
- Notebook Computers
- SIM Ports
- 10/100 Ethernet



### Mechanical Characteristics

- Package: SOT-363
- Lead Finish: Lead Free
- UL Flammability Classification Rating 94V-0
- Quantity Per Reel: 3,000 pcs
- Reel Size: 7 inch

### Absolute Maximum Ratings (T<sub>amb</sub>=25°C unless otherwise specified)

| Parameter                              | Symbol           | Value       | Unit |
|----------------------------------------|------------------|-------------|------|
| Peak Pulse Power (8/20 $\mu\text{s}$ ) | P <sub>pp</sub>  | 100         | W    |
| ESD per IEC 61000-4-2 (Air)            | V <sub>ESD</sub> | $\pm 15$    | Kv   |
| ESD per IEC 61000-4-2 (Contact)        |                  | $\pm 8$     |      |
| Operating Temperature Range            | T <sub>J</sub>   | -55 to +125 | °C   |
| Storage Temperature Range              | T <sub>STJ</sub> | -55 to +150 | °C   |

## Electrical Characteristics (TA=25°C unless otherwise specified)

| Part Number | V <sub>RWM</sub><br>(V) | V <sub>BR</sub><br>(V) | I <sub>T</sub><br>(mA) | V <sub>C</sub><br>@1A | V <sub>C</sub> |      | I <sub>R</sub><br>μA<br>(Max) | C<br>(Pf)<br>(Typ.) |
|-------------|-------------------------|------------------------|------------------------|-----------------------|----------------|------|-------------------------------|---------------------|
|             |                         |                        |                        |                       | (Max)          | (@A) |                               |                     |
| PESD5V0L5UY | 5                       | 6                      | 1                      | 9.8                   | 12.5           | 5    | 1                             | 50                  |

## Characteristic Curves

Fig1. 8/20μs Pulse Waveform

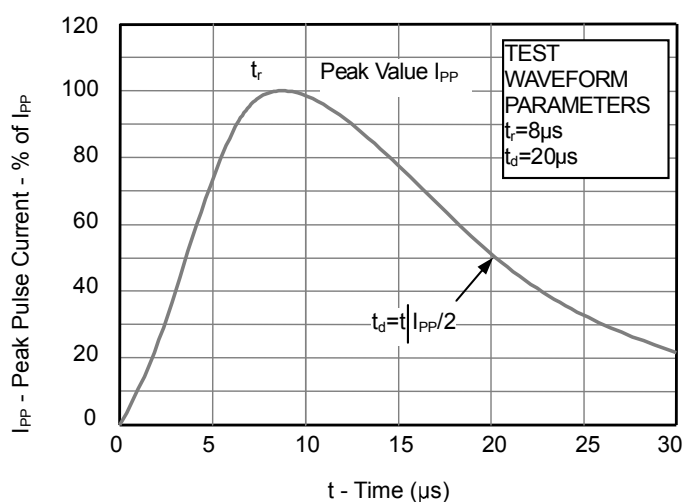


Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)



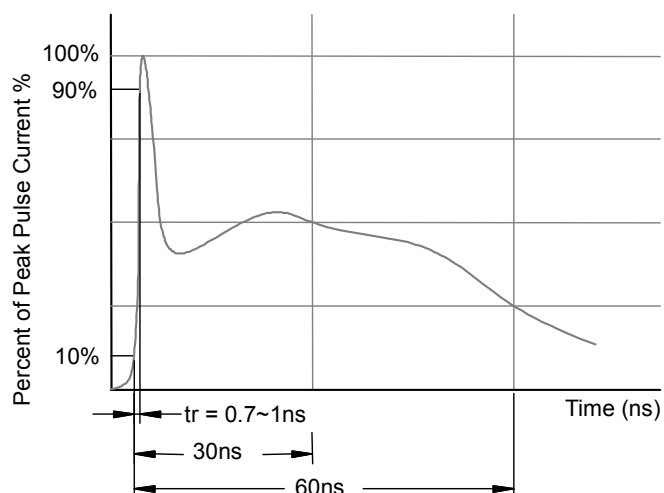


Fig3. Power Derating Curve

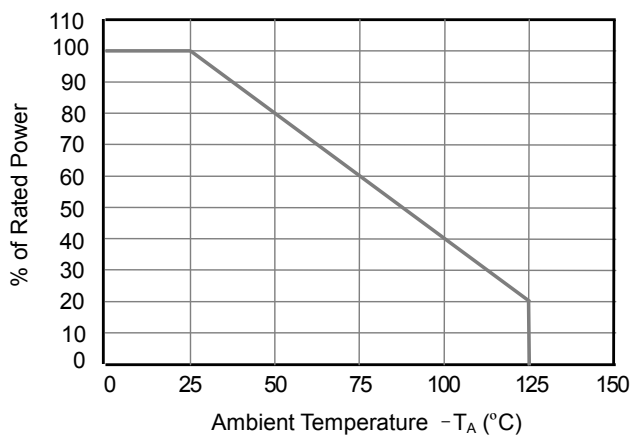


SOT-363 Package Outline & Dimensions

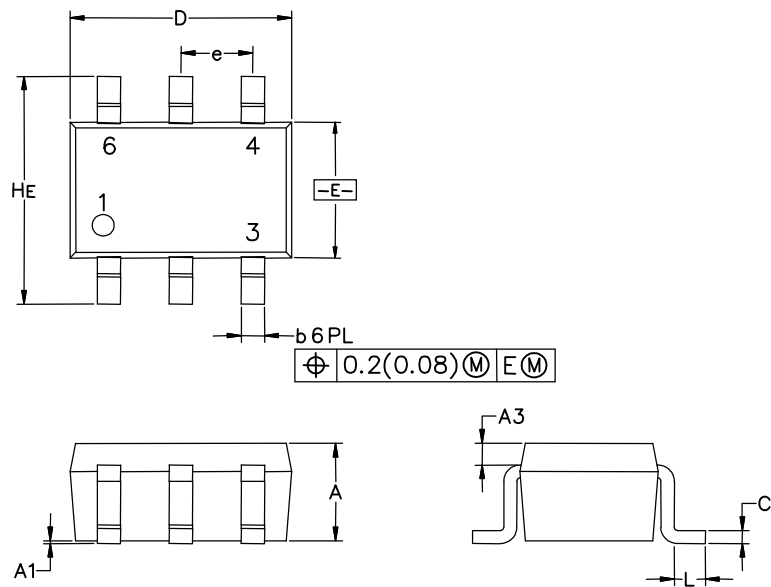

| Symbol | Inches    |       |       | Millimeters |      |      |
|--------|-----------|-------|-------|-------------|------|------|
|        | Min.      | Nom.  | Max.  | Min.        | Nom. | Max. |
| A      | 0.031     | 0.037 | 0.043 | 0.80        | 0.95 | 1.10 |
| A1     | 0.000     | 0.002 | 0.004 | 0.00        | 0.05 | 0.10 |
| A3     | 0.08 REF  |       |       | 0.2 REF     |      |      |
| b      | 0.004     | 0.008 | 0.012 | 0.10        | 0.21 | 0.30 |
| C      | 0.004     | 0.005 | 0.010 | 0.10        | 0.14 | 0.25 |
| D      | 0.070     | 0.078 | 0.086 | 1.80        | 2.00 | 2.20 |
| E      | 0.045     | 0.049 | 0.053 | 1.15        | 1.25 | 1.35 |
| e      | 0.026 BSC |       |       | 0.65 BSC    |      |      |
| L      | 0.004     | 0.008 | 0.012 | 0.10        | 0.20 | 0.30 |
| HE     | 0.078     | 0.082 | 0.086 | 2.00        | 2.10 | 2.20 |

Soldering Footprint

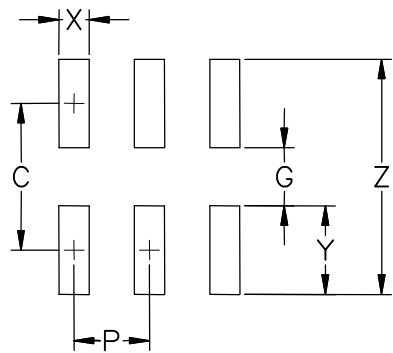

| Symbol | Inches | Millimeters |
|--------|--------|-------------|
| C      | 0.0748 | 1.9         |
| G      | 0.055  | 1.40        |
| P      | 0.025  | 0.65        |
| X      | 0.0157 | 0.40        |
| Y      | 0.019  | 0.50        |
| Z      | 0.0945 | 2.4         |

CCS Semiconductor and **CSemi** are trademarks of Semiconductor Components Industries, CCS Semiconductor reserves the right to make changes without further notice to any products herein. CCS Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does CCS Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. CCS Semiconductor does not convey any license under its patent rights nor the rights of others.