


Features

- 350W peak pulse power (8/20 μ s)
- Ultra low capacitance: 1pF typical
- Ultra low leakage: nA level
- Operating voltage:18V
- Low clamping voltage
- Protects one power line or data line
- RoHS Compliant



SOD-323

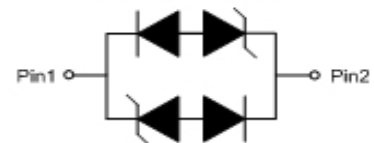

Mechanical Characteristics

- Package: SOD-323
- Case Material: "Green" Molding Compound
- Moisture Sensitivity: Level 1 per J-STD-020
- Marking Information: See Below


Maximum Ratings

PARAMETER	SYMBOL	VALUE	UNIT
Peak Pulse Power (8/20 μ s)	Ppk	350	W
Peak Pulse Current (8/20 μ s)	I _{PP}	8	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V _{ESD}	± 30 ± 30	KV
Operating Temperature Range	T _J	-55 to +125	°C
Storage Temperature Range	T _{stg}	-55 to +150	°C


Electrical Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	CONDITIONS	MIN	TYP	MAX
Reverse Working Voltage	V _{RWM}	V				18
Breakdown Voltage	V _{BR}	V	I _T = 1mA	19.8		
Reverse Leakage Current	I _R	μ A	V _{RWM} = 18V			0.2
Clamping Voltage	V _C	V	I _{PP} = 1A (8/20 μ s pulse)			29
Clamping Voltage	V _C	V	I _{PP} = 8A (8/20 μ s pulse)			45
Junction Capacitance	C _J	pF	V _R = 0V, f = 1MHz		1	3


Characteristics (Typical)

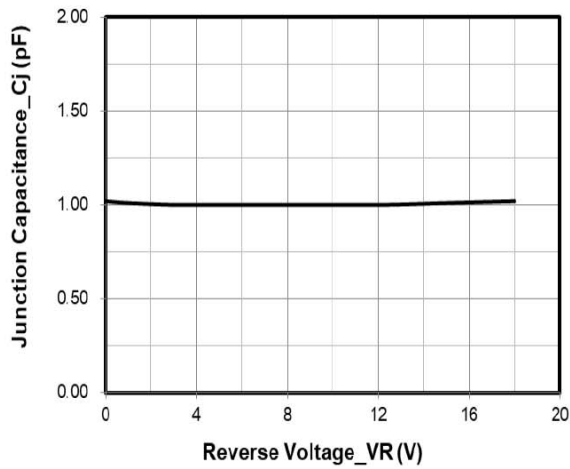


Junction Capacitance vs. Reverse Voltage

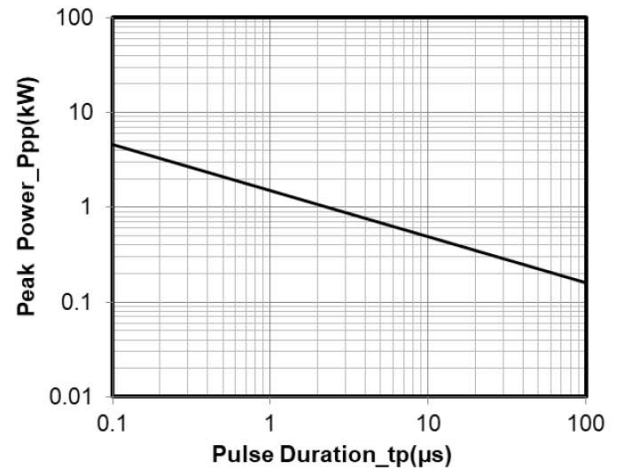


Peak Pulse Power vs. Pulse Time

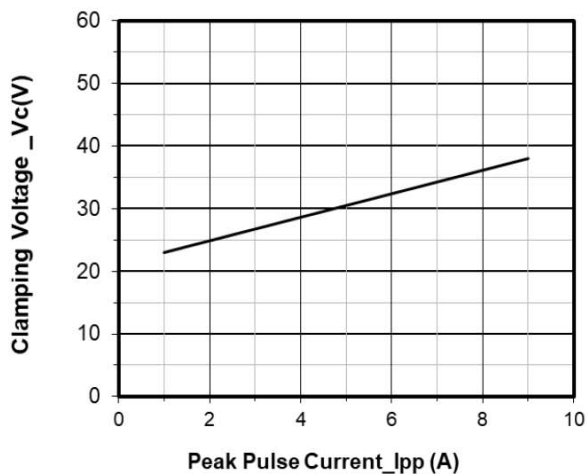


Clamping Voltage vs. Peak Pulse Current

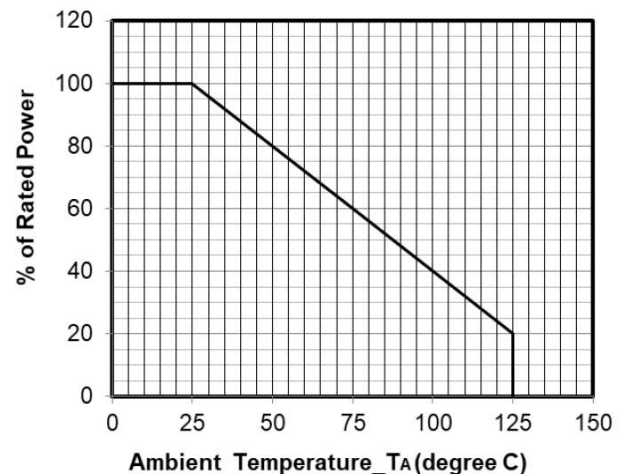

Power Derating Curve

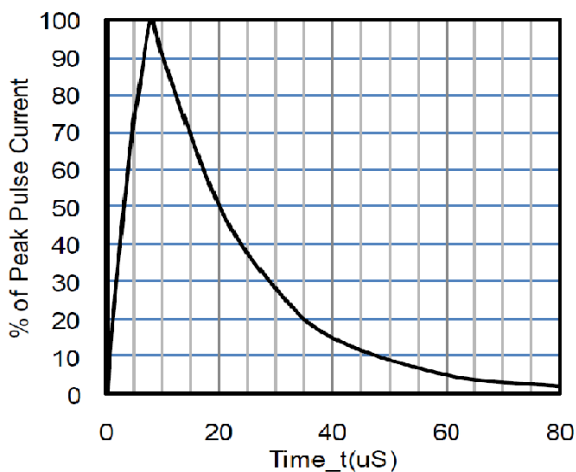


8 / 20 μs Pulse Waveform

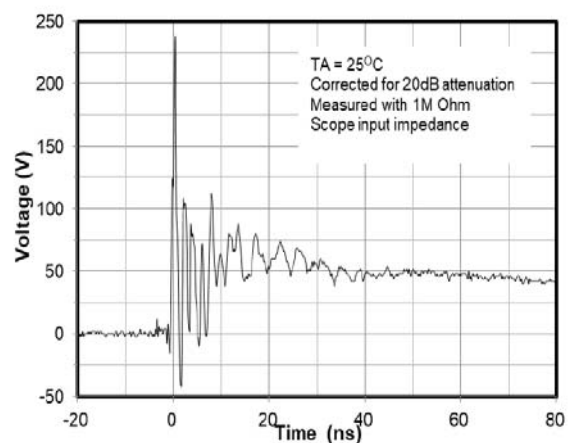

ESD Clamping Voltage
8 kV Contact per IEC61000-4-2

Outline Dimensions

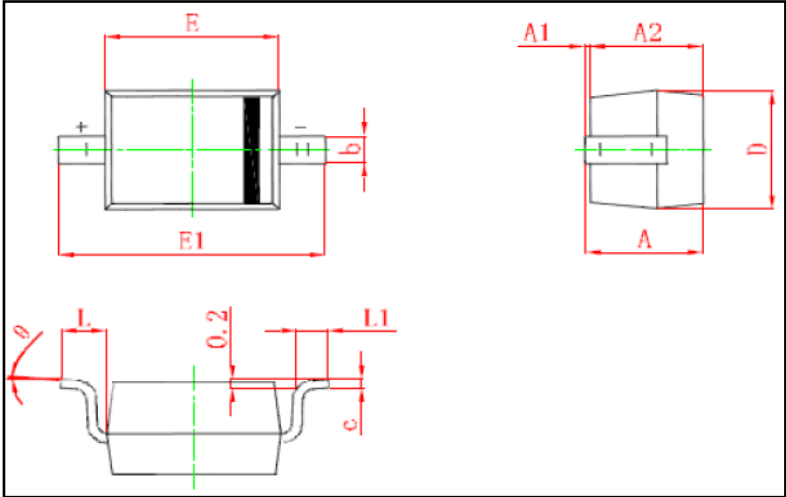

Symbol	Min. (mm)	Max. (mm)
A		1.000
A1	0.000	0.100
A2	0.800	0.900
b	0.250	0.400
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
L	0.475REF	
L1	0.250	0.400
θ	0°	8°

Soldering Footprint

